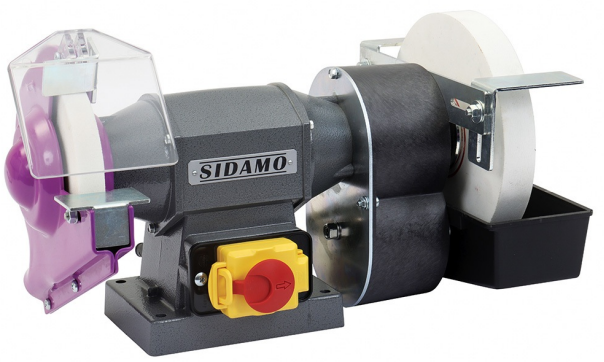

PRO 200 TME

(Ref. 20113131)

Water and dry grinding of ferrous metals
Usage intensif

Guarantee: 3 ans

Photo et textes non contractuels

Product Information:

Cast aluminium body
Fitted with self-lubricated oiltight bearings
Lack of voltage-coil safety device
Emergency Stop through mushroom stay put button
Polycarbonate protective shield
Motor internal automatic heat protection
Pressed metal sheet carters fitted with a nozzle to collect dust
Orientable brush carter
Adjustable anti-spark shield and tool-holders 2 mm away from the wheel

Supplied with:
- Grinding Wheel AA 60 M
- Grinding Wheel AA 150 J

Technical characteristics:

Height (cm) : 25.00
Width (cm) : 25.50
Length (cm) : 46.00
Net weight (Kg) : 11.00
Power(kW)
Power (V) 1-phase 230V
Rotation speed 1 (rpm)
Rotation speed 2 (rpm)
Wheel-1 dimension (mm)
Wheel-2 dimension (mm)
Wheel-1 grain
Wheel-2 grain
Diameter (mm)